






Bike	Yamaha YZF-R125 Euro 5+ / R15 V4 M	Part No.	RYA-129-SYS
Year	2024-Current	Fit Kit	Z039.10755
Notes	Where not supplied use original fittings. Remove OE Gaskets for correct fitment.	dB Killer	SCEXDBK23 - (TYPE V)

Estimated Fitting Time: 90 Minutes

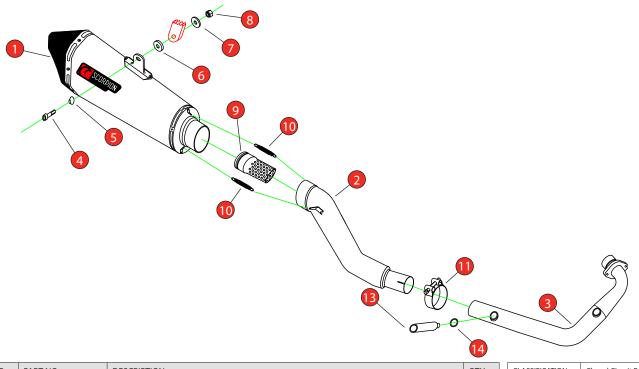

NO.	PART NO.	DESCRIPTION	QTY
1	RSC231	Serket Taper Silencer	1
2	CP1039	Connecting Pipe	1
3	CP1192	Header Pipe	1
Fit Kit	- Z039.10755		
4	Z017.10079	M8 x 55mm Cap Head Bolt	1
5	Z026.20068	Alloy Bolt Finisher	1
6	Z026.20309	Ø30 x 10mm Anodised Alloy Spacer	1
7	Z017.10825	M8 Washer	1
8	Z017.10062	M8 Nyloc Nut	1
9	Z028.20264	Open End Internal Flute	1
10	Z028.10030	Rubber Coated Spring	2
11	Z016.10008	43-47mm Band Clamp	1
12	Z017.12732	Tie Wrap for Lambda Sensor Cable	1
13	Z026.20185	M12 Lambda Catalyst	1
14	Z017.10728	M12 Copper Washer	1

CLASSIFICATION	Closed Circuit Product
HOMOLOGATED	NO
DATE	17/04/24
ISSUE	00
AUTHORISED	G. O'Shea

NOTE: ENSURE SCORPION SYSTEM IS CLE R OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.














FITTING INSTRUCTIONS





Bike	Yamaha YZF-R125 Euro 5+ / R15 V4 M	Part No.	RYA-129-SYS
Year	2024-Current	Fit Kits	Z039.10755
Notes	Where not supplied use original fittings. Remove OE Gaskets for correct fitment.	dB Killer	SCEXDBK23 - (TYPE V)






NOTE: Fitting instructions show the installation of our Red Power Silencer however fitting is the same for the Serket Taper Silencer.

A) On the right side of the bike, remove the lower fairing bolt. This has a nut on the back so you will need to use a spanner as well as a allen key.

B) Remove the bolt from the upper part of the fairing.



D) Remove the 2 lower bolts from the front panel.

E) On the left side of the bike, remove the upper bolt from the front panel.

F) Remove the 2 push clips from underneath the front panel. These release by pushing the centre inwards.

G) Release the clips that hold the fairings to the front panel then remove it from the bike.

H) On the right side of the bike, remove the 2 bolts that join the lower fairing to the upper fairing.

























FITTING INSTRUCTIONS






Bike	Yamaha YZF-R125 Euro 5+ / R15 V4 M	Part No.	RYA-129-SYS
Year	2024-Current	Fit Kits	Z039.10755
Notes	Where not supplied use original fittings. Remove OE Gaskets for correct fitment.	dB Killer	SCEXDBK23 - (TYPE V)






- I) Carefully remove the lower fairing.
- J) Remove both Lambda sensors from the original exhaust.
- K) Remove the 2 header nuts.
- L) Support the weight of the exhaust, then remove the silencer mounting bolt.
- M) Carefully remove the original exhaust from the bike.



O) Fit the Scorpion header pipe to the bike and loosely secure in place with the original header nuts. Do not fully tighten, you will do that in a later step.

P) Slide the Scorpion connecting pipe and the clamp on to the header pipe.



























FITTING INSTRUCTIONS





Bike	Yamaha YZF-R125 Euro 5+ / R15 V4 M	Part No.	RYA-129-SYS
Year	2024-Current	Fit Kits	Z039.10755
Notes	Where not supplied use original fittings. Remove OE Gaskets for correct fitment.	dB Killer	SCEXDBK23 - (TYPE V)







Q) Slide the Scorpion silencer and flute (optional) onto the connecting pipe and align the silencer mounting bracket with the original mount on the bike.

NOTE: THE SCORPION
SILENCER MOUNTS TO THE
OUTSIDE OF THE FRAME
UNLIKE THE ORIGINAL WHICH
MOUNTED TO THE INSIDE.







U) Fully tighten the clamp.

V) Fully tighten the silencer mounting bolt.


W) Fit both Lambda sensors to the Scorpion header pipe. The rear sensor should be fitted with the Lambda Catalyst and copper washer as per the diagram on the front page.

X) Re-fit the fairing and front panel. Installation steps are reverse of removal.

When fitted take bike for a short ride to ensure all functions are correct. When bike & exhaust are cool enough check all nuts and bolts are still secure.





























Bike	Yamaha YZF-R125 Euro 5+ / R15 V4 M	Part No.	RYA-129-SYS
Year	2024-Current	Fit Kit	Z039.10755
Notes	Where not supplied use original fittings. Remove OE Gaskets for correct fitment.	dB Killer	SCEXDBK23 - (TYPE V)

Estimated Fitting Time: 90 Minutes



Thank you for purchasing your Scorpion Silencer. Care of your exhaust: Please refrain from cleaning silencer with heavy solvents or abrasives!

Vielen Dank Fur den kauf eines Scorpion Schalldampfers! Pflegehinweis: Bitte verwenden Sie niemals Scheuermittel oder aggressive Reiniger zur Pflege Ihres Auspuffes!

Merci d'avoir choisi un echappement Scorpion. Entretien de votre silencieux: Ne pas utiliser de solvants ou de produits abrasifs!

Muchas gracias por adquirir un Silencioso Scorpion. Le recomendamos no limpiar el silencioso con productos abrasivos o aquellos que contengan disolventes.

