
Box: PLOCK 1	]		FITTING INSTRUCTIONS 1
BIKE	HONDA CBR 400 NC29 Gullarm	PART NO.	EHA - 59
YEAR	1989 - 1996	FIT KITS	ROUND Z039.10025/R // Oval Z039.11025/O
NOTES	Ensure billet is fitted with M6 x 16mm Cap Heads & Spring Washers Prior to Dispatch	DB-Killer	SCEXDBK12 - (Type B)

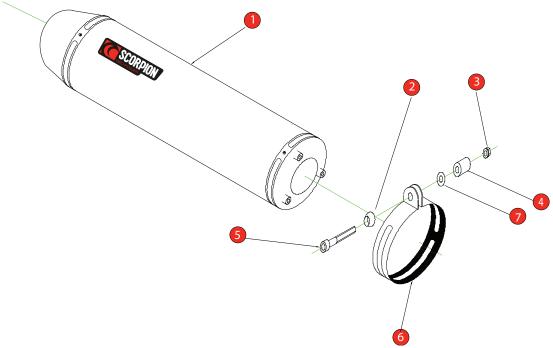

- 1 400mm Silencer (R-ZE40.01C) (O-ZE40.02C)
- 2 Aluminium Bolt Finisher (Z026.20068)
- 3 M8 Nyloc Nut (Z017.10062)
- 4 10mm Spacer (Z026.10004)
- 5 M8 x 60mm Cap head bolt (Z017.10080)
- 6 Comp Silencer Strap (R-Z038.10090) (O Z 038.10088)
- 7 M8 x 25mm Washer (Z017.10825)

NOTE: ENSURE SCORPION SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.

 E-MARK ROUND
 N/A

 E-MARK OVAL
 N/A

 ISSUE NO.
 12

 DATE
 16/04/20

 AUTHORISED
 M.Ydlibi

 CHECKED

A) Remove original exhaust from bike, taking care to keep all original components in a safe place.

B) Refit Scorpion exhaust as per line diagram above.

C) When fitted take bike for a short ride to ensure all functions are correct.

D) When bike & exhaust are cool enough check all nuts and bolts are still secure.

