


Bike	Yamaha MT-125 Euro 5+	Part No.	PYA-134-SYS
Year	2024-Current	Fit Kit	Z039.10768
Notes	Where not supplied use original fittings. Remove OE Gaskets for correct fitment.	dB Killer	SCEXDBK47 - (TYPE PB)

Estimated Fitting Time: 90 Minutes

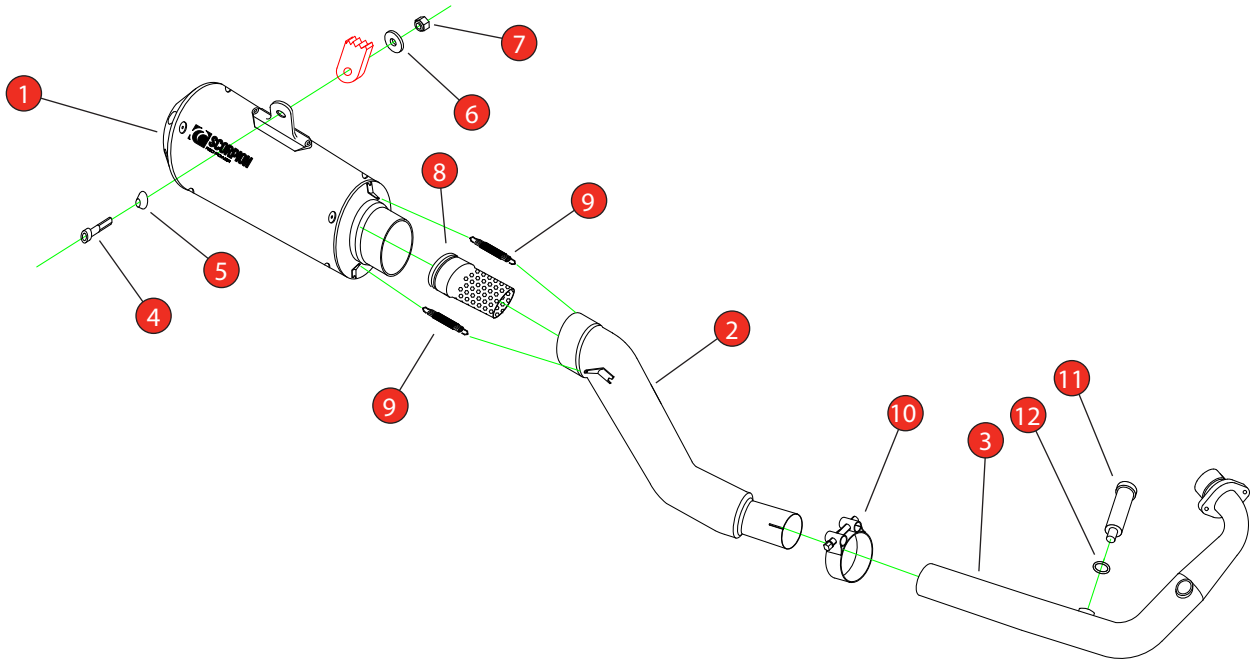

NO.	PART NO.	DESCRIPTION	QTY
1	PSC459	Red Power Silencer	1
2	CP1039	Connecting Pipe	1
3	CP1232	Header Pipe	1
Fit Kit - Z039.10768			
4	Z017.10078	M8 x 50mm Cap Head Bolt	1
5	Z026.20068	Alloy Bolt Finisher	1
6	Z017.10825	M8 Washer	1
7	Z017.10062	M8 Nyloc Nut	1
8	Z028.20264	Open End Internal Flute	1
9	Z028.10030	Rubber Coated Spring	2
10	Z016.10008	43-47mm Band Clamp	1
11	Z026.20185	M12 Lambda Catalyst	1
12	Z017.10728	M12 Copper Washer	1

CLASSIFICATION	Closed Circuit Product
HOMOLOGATED	NO
DATE	25/07/25
ISSUE	00
AUTHORISED	G. O'Shea





<https://youtu.be/9eJo-c-DCws?si=1xRhjXAJ5xZfskFm>

NOTE: ENSURE SCORPION SYSTEM IS CLEAR OF MOVING PARTS AND ALL ORIGINAL FUNCTIONS WORK CORRECTLY.



STAY CONNECTED TO RED POWER.

Bike	Yamaha MT-125 Euro 5+	Part No.	PYA-134-SYS
Year	2024-Current	Fit Kits	Z039.10768
Notes	Where not supplied use original fittings. Remove OE Gaskets for correct fitment.	dB Killer	SCEXDBK47 - (TYPE PB)

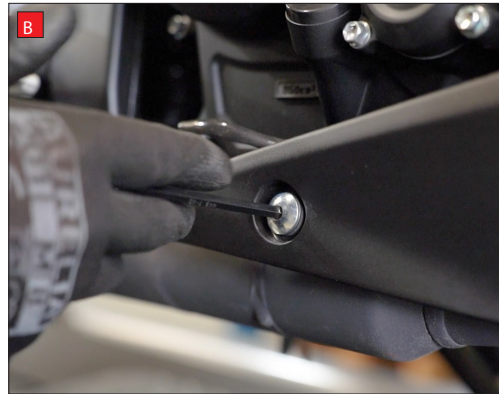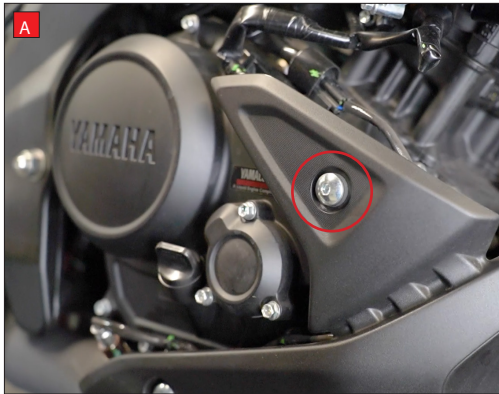

NOTE: These fitting instruction show the Serket Taper being fitted, the Red Power fits in the same way.

A) On the right hand side of the bike, remove the upper mounting bolt for the belly pan fairing.

B) Remove the lower mounting bolt for belly pan fairing.



C) On the left hand side of the bike remove the upper mounting bolt for the belly pan fairing.

D) Remove the lower mounting bolt for the belly pan fairing. Then remove the fairing from the bike.

E) Disconnect the 2 lambda sensor plugs on the right hand side of the bike.

F) Remove both lambda sensors from the original exhaust.



G) Remove the header nuts.

H) Support the weight of the exhaust, then remove the silencer mounting bolt.



Bike	Yamaha MT-125 Euro 5+	Part No.	PYA-134-SYS
Year	2024-Current	Fit Kits	Z039.10768
Notes	Where not supplied use original fittings. Remove OE Gaskets for correct fitment.	dB Killer	SCEXDBK47 - (TYPE PB)



I) Carefully remove the exhaust from the bike.

J) Screw the rear lambda sensor into the lambda catalyst.

K) Using the supplied copper washer, screw the lambda catalyst into the rear sensor boss on the header pipe.

L) Loosely fit the header pipe. You will fully tighten in a later step.



M) Slide the connecting pipe and supplied clamp onto the header pipe.


N) Place the flute into the connecting pipe if required.

O) Slide the Scorpion silencer onto the connecting pipe and roughly align with the mounting point on the frame.

P) Place the spacer between the Scorpion bracket and the mounting point on the frame, then loosely secure in place with the supplied mounting hardware. You will fully tighten in a later step.



Bike	Yamaha MT-125 Euro 5+	Part No.	PYA-134-SYS
Year	2024-Current	Fit Kits	Z039.10768
Notes	Where not supplied use original fittings. Remove OE Gaskets for correct fitment.	dB Killer	SCEXDBK47 - (TYPE PB)

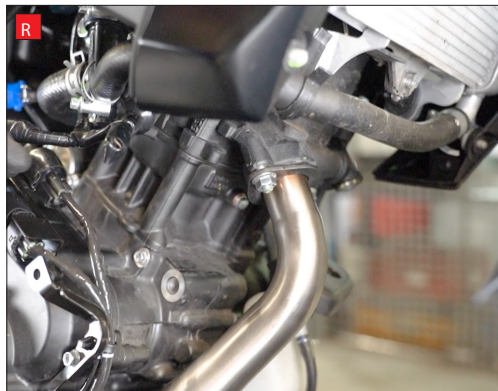

Q) Fit the springs between the spring hoops.

R) Fully tighten the header nuts.

S) Fully tighten the clamp between the header pipe and connecting pipe.


T) Fully tighten the silencer mounting bolt.

U) Fit the primary lambda sensor into the header pipe and fully tighten.

V) Route both lambda sensor cable back to their original position and reconnect the plugs.

W) Re-fit the belly pan fairing and fully tighten the mounting bolts.

When fitted take bike for a short ride to ensure all functions are correct. When bike & exhaust are cool enough check all nuts and bolts are still secure.

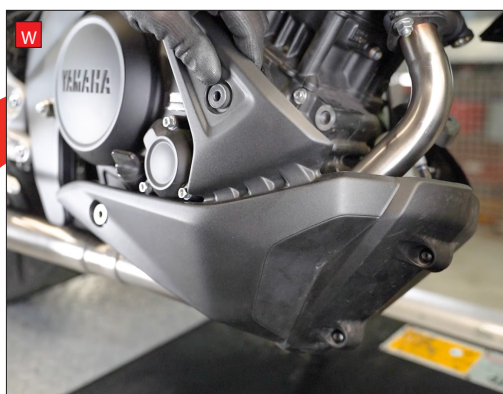

Bike	Yamaha MT-125 Euro 5+	Part No.	PYA-134-SYS
Year	2024-Current	Fit Kit	Z039.10768
Notes	Where not supplied use original fittings. Remove OE Gaskets for correct fitment.	dB Killer	SCEXDBK47 - (TYPE PB)

Estimated Fitting Time: 90 Minutes



Thank you for purchasing your Scorpion Silencer.

Care of your exhaust: Please refrain from cleaning silencer with heavy solvents or abrasives!

Vielen Dank Für den kauf eines Scorpion Schalldampfers! Pflegehinweis: Bitte verwenden Sie niemals Scheuermittel oder aggressive Reiniger zur Pflege Ihres Auspuffes!

Merci d'avoir choisi un echappement Scorpion.

Entretien de votre silencieux: Ne pas utiliser de solvants ou de produits abrasifs!

Muchas gracias por adquirir un Silencioso Scorpion. Le recomendamos no limpiar el silencioso con productos abrasivos o aquellos que contengan disolventes.



STAY CONNECTED TO RED POWER.